

Technical data sheet

INSOLA Thermo Spray 3D polyurethane thermal insulation for professional use with a foam gun

Product description:


Sprayable, ready-to-use one-component, self-expanding polyurethane thermal insulation foam with a special nozzle for the foam gun application. Both horizontal and vertical surfaces can be covered easily. It is also ideal for insulating uneven or curved surfaces, hard-to-reach areas where traditional insulation methods are difficult to apply. Helps reduce thermal bridges and prevents condensation.

| | |
|--|-----------------------------|
| Base | Polyurethane |
| Curing system | Polymerisation due humidity |
| Surface formation time | 15 min |
| Fully cured | 24 hours |
| Thermal conductivity | 0.030 W/(m*k) |
| Water vapour resistance factor μ | 16,4-18,5 |
| Water absorption (short-term, partial immersion) | 0,11 kg/m ² |
| Share of closed cells | 80% |
| Sound reduction index Rst, w | 60 dB |
| Temperature resistance of fully cured product | (-60°C ... +110°C) |
| Yield (*) (3 cm layer) | Up to 2,5 m ² |

(*) Depending on the number of layers.

Areas of application:

Suitable for use on all types of surfaces to provide heat and sound insulation. Sprayable thermal insulation is ideal for use in difficult, hard-to-reach areas where traditional insulation is complicated to apply. Also, for thermal insulation of attics, balconies, baths, garages, basements, tanks and containers. Used in lintels, doors, ceilings and other areas of building construction where cold bridges tend to form. Suitable for insulating all common building materials (such as concrete, masonry, stone, wood, EPS, gypsum board, most metals, gypsum boards, rigid PVC, etc.). No adhesion to PE, PP, PTFE and silicone. We recommend a preliminary adhesion and compatibility test for each surface.

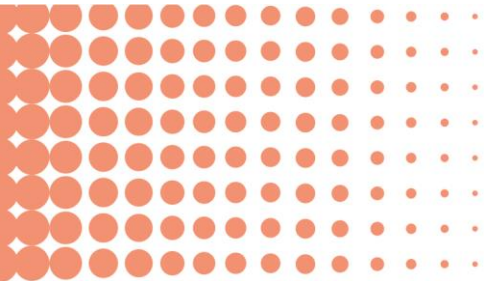

Advantages:

- Seals all hard-to-reach places in construction
- Savings energy costs. Extremely effective thermal insulation is guaranteed.
- Acoustic barrier. Extremely effective sound insulation is provided
- Effective protection of the building from drafts and moisture is ensured.
- Remains elastic, does not collapse
- Waterproof (water resistant)
- Suitable for uneven and hard-to-reach surfaces
- Prevents the accumulation of condensate
- Helps prevent cold bridges

Application conditions:

The air temperature during use can be +5°C to +35°C, although the best results are obtained at +20°C. The temperature of the can during application must be +18°C to +25°C, although the best result is obtained at a temperature of +20°C. Dust, loose particles and oils must be removed from the application surface. The fully cured foam can be painted with non-solvents paints.

Application instructions:

Attach the nozzle on the foam gun barrel. Shake the can well at least 20 times. Attach the aerosol dispenser directly into the gun. While holding the handle of the foam gun with one hand, screw the can on the foam gun with the other hand. Before screwing on the can, make sure that the foam gun is not pointed at persons. Do not screw in the inverted aerosol dispenser or rotate the gun on the dispenser. Adjust the nozzle to the required position (depending on the vertical or horizontal spray pattern). Turn the gun flow regulator to the maximum position. Foam output is controlled by pressing on the trigger of the gun. Spray the foam at a distance of about 40 cm to the surface. The exact distance is chosen according to the width of the surface to be sprayed – the narrower the area the shorter the distance and vice versa. Keep in mind that the sprayed foam doubles in size. Do not spray layers that are thicker than 2.5 cm at a time. If more layers are needed, wait about 30 minutes before spraying the next layer. Moisture after each layer.


Colour:

White yellow

Packaging:

1000 ml aerosol spray, content 850 ml, 12 pcs. in a box.

Shelf life before opening the package: 24 months

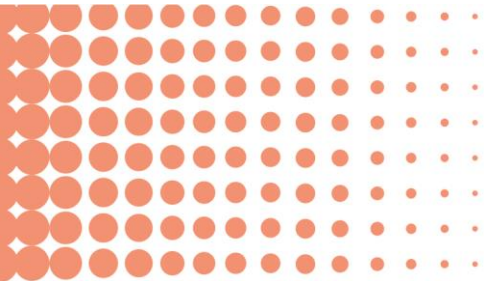

Storage:

The bottles should be stored and transported in an upright position. Store in a dry, cool place at a temperature of +5°C to +35°C. Aerosols should not be stored at a temperature above +50°C or in direct sunlight.

Safety requirements:

This product is flammable. Protect from overheating and keep away from sources of ignition. Avoid direct sunlight. Contains isocyanates. May produce an allergic reaction. Wear safety goggles, gloves, and respirator. Ensure adequate ventilation. Keep out of the reach of children. The can is under pressure. Do not pierce or damage it, even after use.

Detailed safety information is provided in the Safety Data Sheet (SDS).